


# Great results for small workgroups.

The M2635dn is the most affordable model in our new ECOSYS series, yet it is still full of features. As extremely reliable devices with 1,200 dpi b/w print quality, duplex printing, gigabit Ethernet and overall fast scanning and copying, it is perfectly suited for demand-ing desktop users and small workgroups.



**ECOSYS M2635dn**

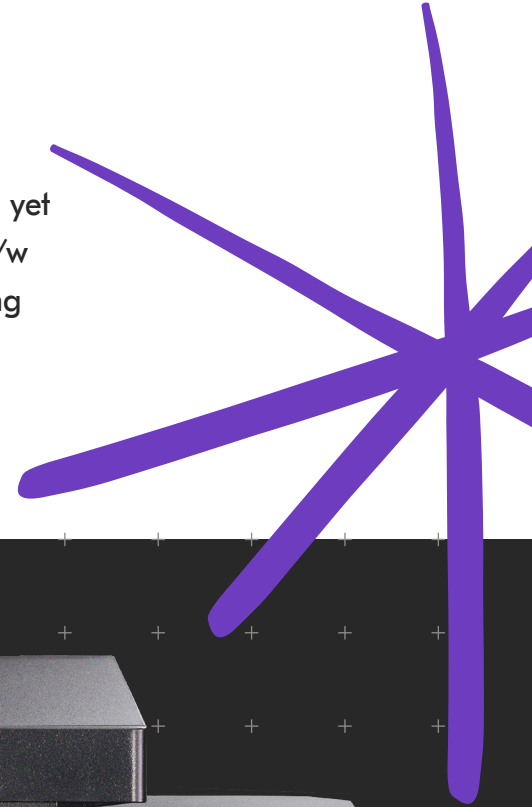

**Up to 35 pages per minute in A4**

**1,200 dpi printing quality**

**Fast scanning and copying**

ECOSYS M5526cdw

## Specifications

### ECOSYS

ECOSYS stands for ECOlogy, ECONomy and SYStem-printing. With their longlife components, ECOSYS devices are designed to maximise durability and minimise the total cost of ownership with regard to maintenance, administration and consumables. The cartridgefree system means that toner is the only consumable. The modular design concept allows you to add workflow enhancing functions as required. Integrated system software provides long-term cross network compatibility. KYOCERA's long-life components cost you and the environment less.

### Environmental print features

Duplex print mode (Double sided printing), N-Up printing mode (N pages on 1 sheet), Toner save mode (Draft print mode), Quiet mode (reduced print speed).

### KYOCERA NetViewer

KYOCERA NetViewer enables complete monitoring and control of all ECOSYS printers and digital KYOCERA multifunction units from any Windows® PC and thus provides ideal network administration. It also supports the standardised SNMP protocol.

### ECOSYS M2635dn

#### GENERAL

**Technology:** KYOCERA ECOSYS Laser

**Control panel display:** 5 line LCD display

**Engine speed:** Up to 35 pages A4 per minute

**Resolution:** 300 dpi, 600 dpi, 1,200 dpi

**Warm-up time:** Approx. 17 seconds or less

**Time to first print:** Approx. 6.8 seconds or less

**Time to first copy:** Approx. 6.9 seconds or less

**CPU:** 800 MHz

**Memory:** Standard 512 MB, max. 1,536 MB

**Standard interface:**

USB 2.0 (Hi-Speed), USB Host Interface, Gigabit Ethernet (10BaseT/100BaseTX/1000BaseT), Slot for optional SD/SDHC-Card

**Dimensions (W x D x H):** Main unit: 417 x 412 x 437 mm

**Weight:** Main unit: Approx. 19 kg

**Power source:** AC 240 V, 50 Hz

**Power consumption:**

**Copy/Print BW:** 661 W

**Ready mode:** 21 W

**Sleep-mode:** 1 W

**Noise (Sound pressure level: ISO 7779/ISO 9296):**

**Copy/Print:** 47.2 dB(A) LpA

**Quiet mode:** 44.1 dB(A) LpA

**Ready/Standby mode:** Immeasurably low

**Sleep mode:** Immeasurably low

**Safety standards:** AS/NZ s3260

This unit is manufactured according to ISO 9001 quality standard and ISO 14001 environmental standard.

#### PAPER HANDLING

All paper capacities quoted are based on a paper thickness of max. 0.11 mm. Please use paper recommended by KYOCERA under normal environmental conditions.

**Input capacity:** 100-sheet multi-purpose tray; 60 – 220 g/m<sup>2</sup>; A4, A5, A6, B5, B6, Letter, Legal, Custom (70 x 148 mm – 216 x 356 mm) 250-sheet universal cassette; 60 – 163 g/m<sup>2</sup>; A4, A5, A6, B5, Letter, Legal, Custom (105 x 148 – 216 x 356 mm). Max. input capacity with options: 850 sheets

**Duplex functionality as standard:** Double-sided printing; 60 – 163 g/m<sup>2</sup>; A4, A5, B5, Letter, Legal

### Command Center RX

The Command Center RX enables to control and manage various settings by accessing the device via Web browser.

### USB Host Interface for USB Flash Memory

Documents can be printed directly from a USB Flash Memory (e.g. USB stick) via the USB host interface. The documents stored as PDF, XPS, TIFF or JPEG are selected directly via the printer's control panel. No computer is required.

### Application-based Profiles

The KX printer driver can create a direct link between dedicated applications and predefined or customised print profiles. You can set that all documents from a user or an application be printed with activated duplex mode as standard, thus leading to a reduced paper consumption.

**Document processor:** 50-sheet, 50–160 g/m<sup>2</sup>, A4, A5, A6, B5, B6, Letter, Legal, Custom (100 x 148 to 216 x 356 mm)

**Output capacity:** Max. 150 sheet face down with paper full detection

#### PRINT FUNCTIONS

**Controller language:** PRESCRIBE IIc

**Emulations:** PCL 6 (PCL 5e/PCL-XL), PostScript 3 (KPDL 3), PDF Direct Print, XPS/OpenXPS

**Operating systems:** All current Windows operating systems, MACOSX Version 10.5 or higher, Unix, Linux as well as other operating systems on request

**Fonts/barcodes:** 93 scalable fonts for PCL6/KPDL3, 8 fonts for Windows Vista, 1 bitmap font, 45 barcodes (e.g. EAN8, EAN13) with automatic generation of checksums as well as support of two-dimensional barcodes PDF-417 under PRESCRIBE (PCL and other barcodes available as an option)

#### COPY FUNCTIONS

**Max. original size:** A4(Platen)/Legal(DP)

**Continuous copying:** 1 – 999\*\*\*

**Zoom range:** 25 – 400% in 1% steps

**Pre-set magnification ratios:** 7 Reductions/5 Enlargements

**Exposure mode:** Manual: 9 steps

**Image adjustments:** Text + Photo, Photo, Text, Map

**Features:** Scan-once-copy-many, electronic sort, 2in1, 4in1, ID-card copy, priority print, program, continuous scan, auto cassette change, copy density control

#### SCAN FUNCTIONS (Simplex)

**Functionality:** Scan-to-e-mail (SMTP), Scan-to-FTP (FTP over SSL), Scan-to-SMBv3, Scan to USB Host, TWAIN scan (USB, network), WSD (WIA) scan (USB, network)

**Scan speed:** 40 ipm (300 dpi, A4, b/w), 23 ipm (300 dpi, A4, colour)

**Scan resolution:** 300dpi x 300dpi, 200dpi x 200dpi(Default), 200dpi x 100dpi, 600dpi x 600dpi, 400dpi x 400dpi, 200dpi x 400dpi

**Max. scan size:** A4(Platen), Legal(DP)

**Original recognition:** Text + Photo, Photo, Text, Light Text/ Fine Line, Text (for OCR)

**Scan file formats:** TIFF, PDF, PDF/A-1, high compression PDF, encrypted PDF, JPEG, XPS

**Compression method:** MMR/JPEG

**Features:** Integrated address book, LDAP, encrypted data transfer, Blank sheet skip

#### FAX FUNCTIONS

**Compatibility:** ITU-T Super G3

**Modem speed:** Max. 33.6 kbps

**Transmission speed:** Less than 3 seconds

**Scanning speed:** 2 sec./sheet or less

**Address book:** 200 entries

**Scanning densities:**

Normal: 200 x 100 dpi, Fine: 200 x 200 dpi,

Superfine: 200 x 400 dpi, Ultrafine: 400 x 400 dpi

**Maximum original size:** A4, Legal

**Compression method:** JBIG, MMR, MR, MH

**Features:** Network fax, duplex transmission and reception, polling transmission and reception

#### CONSUMABLES

Average continuous toner yield in accordance with ISO 19752

**Toner-Kit TK-1184:** toner yield 3,000 pages A4  
Starter toner: toner yield 1,000 pages A4

#### OPTIONS

**PF-1100 Paper feeder (max. 2 units):** 250 sheets; 60 – 163 g/m<sup>2</sup>; A4, A5, A6, B5, Letter, Legal, Custom

(105 x 148 mm – 216 x 356 mm)

**Memory upgrade:** DIMM-1GBE: 1,024 MB

**UG-33:** ThinPrint support

**USB IC Card Reader + Card Authentication Kit (B):** Support for various authentication keys available

#### WARRANTY

2 years Return-to-base as standard.

Optional upgrade to On-site available.

Operation is remarkably quiet and, with even smaller dimensions than their predecessors, they fit on virtually every desk. Finally, thanks to many flexible paper-handling options, the device can be customised to meet your demands precisely.



# KYOCERA



## Brisbane Business Equipment

Unit 1, 747 Fairfield Road,  
Yerrongpilly 4105

Ph (07) 32559500

email: sales@bbe.net.au

Kyocera Document Solutions does not warrant that any specifications mentioned will be error-free. Specifications are subject to change without notice. Information is correct at time of going to press. All other brand and product names may be registered trademarks or trademarks of their respective holders and are hereby acknowledged.

KYOCERA Document Solutions Australia Pty. Ltd ABN 77 003 852 444